


# K138 CT Fluid

## Cutting & Tapping Fluid

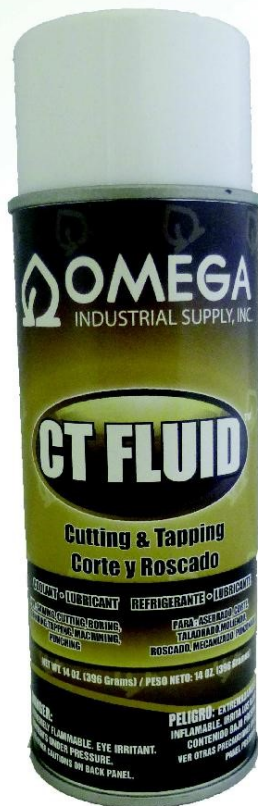

**CT FLUID** is a foaming transparent coolant and lubricant designed for portable and field operations. **CT FLUID** is useful on many surfaces including Carbon Steel, Stainless Steel, Aluminum, Bronze, Titanium, Chrome-Moly, Vanadium Steel, Inconel, Monel, Phosphor, Beryllium-Copper and other exotic alloys. **CT FLUID** cools work pieces, causing less heat distortion and tool burning, thereby increasing production and lengthening tool life. **CT FLUID** is transparent providing better visibility of work area, its foam clings to cutting tools therefore reducing waste and over spray and cooling cutting tools for a longer tool life.

**Directions:** Shake can well before using. Spray area to be worked generously. Reapply as necessary to keep work area cool and well lubricated.

Health	1
Flammability	2
Physical Hazard	0
Protection	B

### Areas of Use:

- \*Bottling Plants
- \*Steel Mills
- \*Parks/Recreations
- \*Hotels
- \*Ship Yards
- \*Factories
- \*Refineries
- \*Municipalities

Appearance and odor.....	N/A
VOC% .....	15.00000%
Net Wt. ....	14 oz.

Distributed By:

KAYLINE COMPANY, INC. PO BOX 603207, CLEVELAND, OHIO 44103 (216) 566-9858 (800)426-5820 FAX (216)566-1228

[www.kaylinecompany.com](http://www.kaylinecompany.com)