


K67 Dri Moly

Moly Based Dry Lubricant

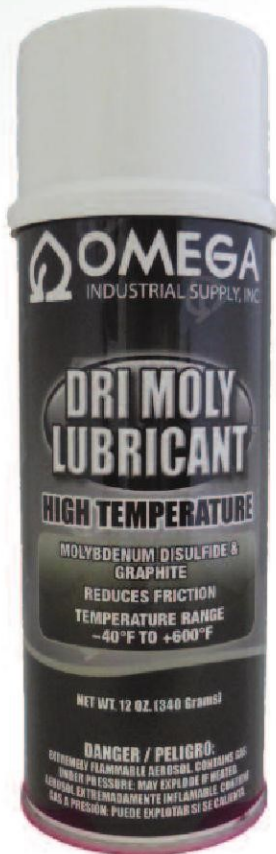

DRI MOLY is a molybdenum disulfide dry film lubricant that withstands high pressures and temperatures. Lubricates moving parts of all kinds. Fast drying with minimal transfer. Protects from rusting and corrosion by displacing moisture. Reduces metal to metal contact on treated surfaces. Service temperatures range from -40°F to 600°F. Convenient aerosol is ideal for lubricating surfaces where a liquid lubricant is not practical. **DRI MOLY** quick drying, non-tacky finish adheres well to all metals, most plastics, glass and rubber. Molybdenum disulfide replaces graphite to free frozen surfaces, stop galling and seizing of metals and prevents chattering, extending the life of machinery and equipment. Provides a protective barrier that resists dust and abrasive particles and withstands water, oils, alkali and most acids.

Directions: Shake can well before using. Clean surface thoroughly with Omega's **MEGA POWER** degreaser. Hold can 6 to 8 inches from surface and apply a thin, even film. Thick coats decrease efficiency. Allow 1 to 5 minutes for adequate drying. The concentration of solids in this product may clog nozzle. Shake vigorously and often. Before storing, turn can upside-down and spray until clear.

Health	2
Flammability	3
Physical Hazard	1
Protection	B

Areas of Use:

- *Automotive Shops
- *Municipalities
- *Parks/Recreations
- *Marine
- *Chemical/Textile Plants
- *School Districts
- *Amusement Parks

Appearance and odor.....	Black spray with Chlorinated solvent odor.
Specific Gravity (H2O=1).....	1.29 @77°F (25°C)
VOC %	24%
Net Wt.	12 oz.

Distributed By:

KAYLINE COMPANY, INC. PO BOX 603207, CLEVELAND, OHIO 44103 (216) 566-9858 (800)426-5820 FAX (216)566-1228

www.kaylinecompany.com